

GLOBAL LINK CAFFOLDING

Terms and Conditions

Any Damage caused to the structure or equipment will be charged to the operator.

There will be NO alterations to the structure unless done by a competent Global Link employee.

Global Link will not be held responsible for any loss, injury or death while working on the structure altered or not.

On completion of this document the user agrees that all employees has had the necessary training e.g. working at heights,

First aid, medicals, safety induction, scaffold induction e.t.c

PPE will be worn at all times by all employees using the structure. This will be the responsibility of the supervisor.

It is the user's responsibility to report any corrosion, damage or unauthorized alterations to the structure between daily inspection periods.

All structures need to be inspected by the user before use on a daily basis and report any faults to the scaffolding inspector.

An outdoor structure should not be used in hazardous weather conditions.

The structure should be inspected again after heavy winds, dry weather, rain, storms or any other factors which might affect the safety of the structure. It is the user or supervisors responsibility to report this to the inspector.

For Aluminum structures, the maximum height should be 12.5m indoors and 8.5m outdoors,

Anything higher must be tied to a piggy back structure.

Safety Harnesses should not be attached to the fixtures.

The user should not store any material on the structure or scaffolding boards as this could jeopardize safety to the user and pedestrians.

The structure should only be used for the intended purposes.

Physical barriers should be in place to prevent injuries of people working under the structure (responsibility of the user)

(Tape is not recommended)

If the structure is left unattended, the access ladder should be removed or barricaded off to prevent access to unauthorized personnel.

Movable structures must have their wheels locked when workers are working from the tower.

The scaffolding must be inspected atleast once a week as required by the OSH Act Regulations

Do not remove ties, braces, guard rails, toe boards, platform boards or safety nets

Extra inspections may be required after stormy weather or mishap. The COSTOMER shall ensure that these inspections are made and any remedial work done, so that this scaffold continues to comply with the OSH Act Regulations. Inspections must be recorded in a register, (Construction Regulations 14(1) and (2); SANS 10085-1

You are not permitted to use any scaffold not marked with a green safe to use tag

It is mandatory for all users to attend a safety induction performed by Global Link Scaffolding

The user and induction register should be signed


Any new employee who intends using the scaffold must attend the induction and sign both registers

Any adjustments made to the structure must be documented, inspected and signed by the client for approval

All company policies, rules, procedures and plans were explained to my team and I detail. I will ensure they are followed in to strictest manner


DATE:	
SIGNATURE:	

GLOBAL S LINK CAFFOLDING

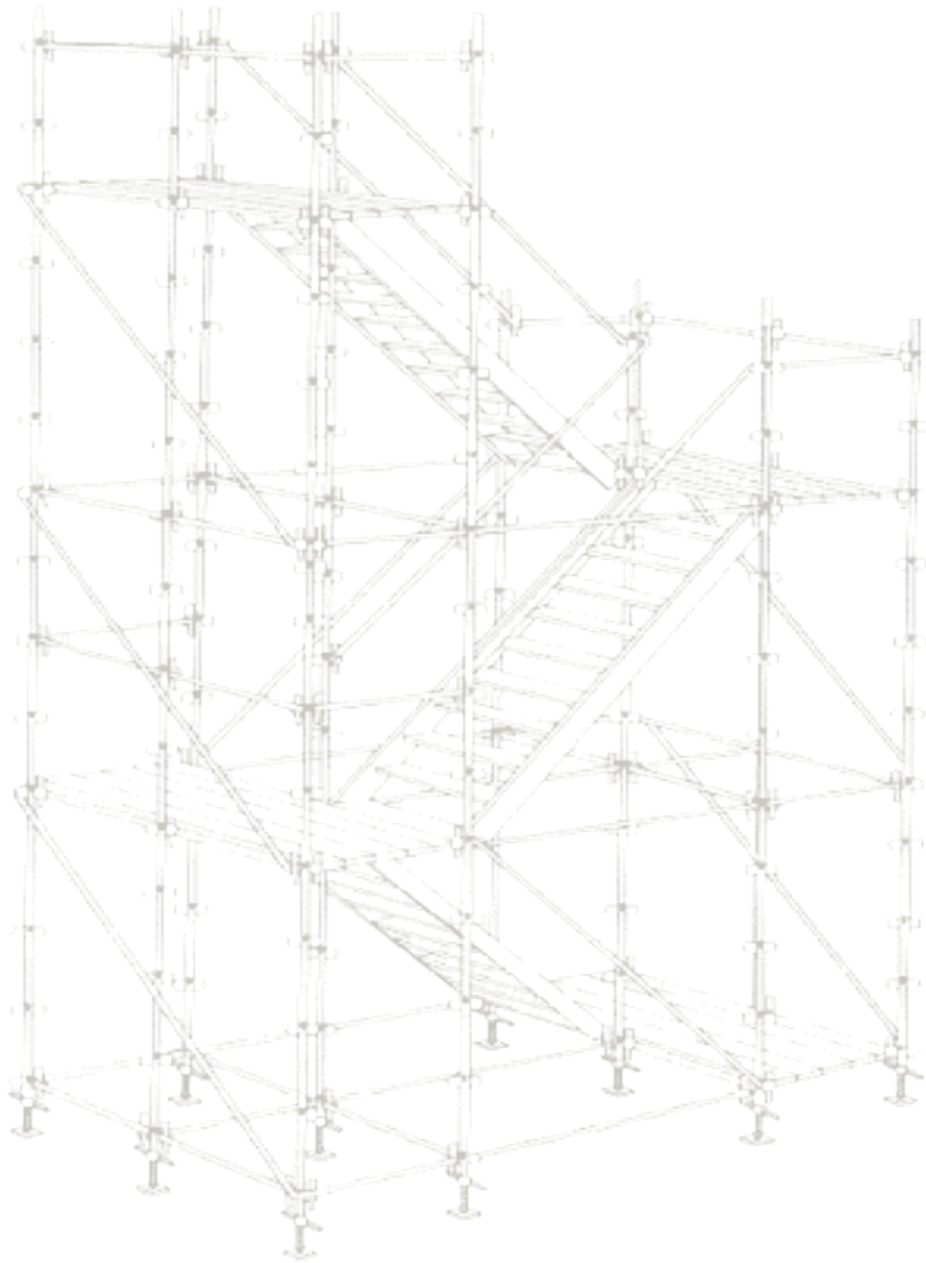

Full Associate Member of the Scaffolding Association of Southern Africa
Members: I.L.Mulla, A.R.Timol, J. Beacon

GLOBAL **S** LINK CAFFOLDING

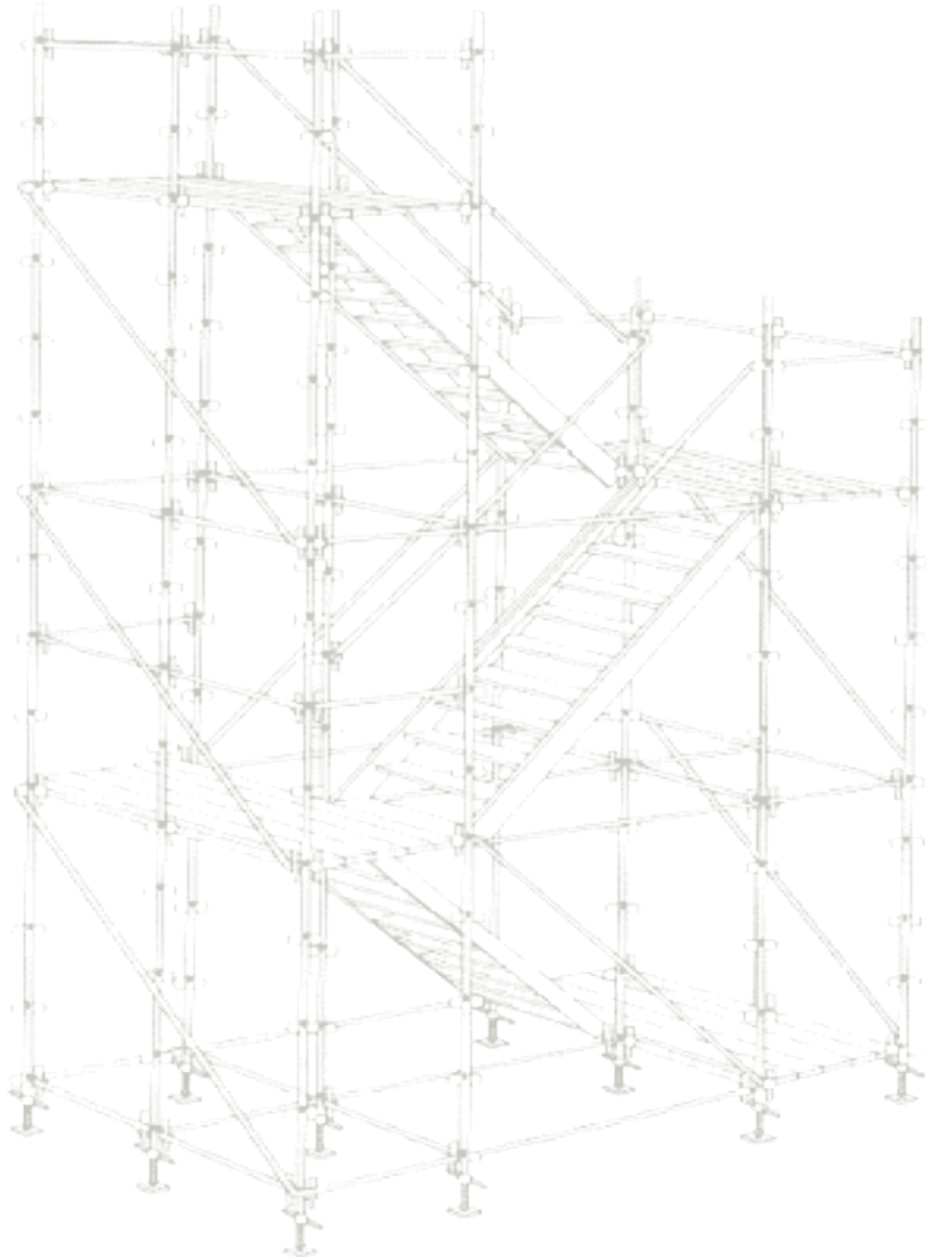

Full Associate Member of the Scaffolding Association of Southern Africa
Members: I.L.Mulla, A.R.Timol, J. Beacon